

Composing spatial soundscapes using acoustic metasurfaces

Thomas J. Graham[†]
Thor Magnusson*

t.j.graham@sussex.ac.uk
t.magnusson@sussex.ac.uk

[†]University of Sussex, Department of
Informatics
Brighton, United Kingdom

Chinmay Rajguru[†]
Arash Pour Yazdan[†]

c.rajguru@sussex.ac.uk
ap293@sussex.ac.uk

*University of Sussex, Department of
Music
Brighton, United Kingdom

Alex Jacobs*

Gianluca Memoli[†]

alexjacobs737@gmail.com
g.memoli@sussex.ac.uk

ABSTRACT

In this work, we explore the use of acoustic metamaterials in delivering spatially significant acoustic experiences. In particular, we discuss a user study run in a space where a dedicated composition is played through a metamaterial "prism". Results show users perceive sound to be louder in the direction determined by the metamaterial, depending on its frequency. This demonstrates how an acoustic metamaterial prism, in combination with an electronic composer, may be used to deliver different sound messages to different parts of an audience, even with a single speaker. We underpin our conclusions with user observations and heuristic considerations on possible application scenarios.

CCS CONCEPTS

• **Human-centered computing** → **Sound-based input / output**; • **Hardware** → *Sound-based input / output*; *Emerging interfaces*; • **Applied computing** → Physics.

KEYWORDS

metamaterials, immersivity, digital composer, sound interface, soundscape

ACM Reference Format:

Thomas J. Graham[†], Thor Magnusson*, Chinmay Rajguru[†], Arash Pour Yazdan[†], Alex Jacobs*, and Gianluca Memoli[†]. 2019. Composing spatial soundscapes using acoustic metasurfaces. In *Audio Mostly (AM'19)*, September 18–20, 2019, Nottingham, United Kingdom. ACM, New York, NY, USA, 8 pages. <https://doi.org/10.1145/3356590.3356607>

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

AM'19, September 18–20, 2019, Nottingham, United Kingdom

© 2019 Association for Computing Machinery.

ACM ISBN 978-1-4503-7297-8/19/09...\$15.00

<https://doi.org/10.1145/3356590.3356607>

1 INTRODUCTION

Any theatre director or sound artist experiences that there is a net difference between the way light and sound are managed. While it is possible to deliver light cues almost matching the director's wishes, including moving spotlights, diffused illumination and alternated areas of light and shadows, similar solutions are not easily available for audio. Delivering personalised sound experiences to different members of the audience - while keeping costs at bay - requires them to wear headphones.

Even solutions including multiple speakers and complex signal processing (i.e. speaker arrays), typically used in immersive cinemas to elicit in the audience the feeling of spatial audio¹, are designed for the whole audience to have the same experience. That, however, is often difficult as there will be "sweet spots" in the room that give a more immersive and optimal experience than in other locations.

The increasing demand on delivering directional cues in the audio industry has led to the development of parametric speakers². These devices exploit the directional emission of an ultrasonic array and the non-linearity of sound propagation in air to produce audible sounds in a narrow beam. The emission of these speakers is typically contained within $\pm 10^\circ$ from the speaker axis [7, 8], with the sound outside up to 16 dB lower. They are often used to elicit surprise in listeners or for personal messaging, in advertising and educational contexts [7], but they are not widespread due to the associated costs and to the low quality of the reproduced sound.

Acoustic metamaterials may offer a cheaper alternative. These are standard materials (i.e. 3D-printer plastic, wood, metal, paper), engineered at the sub-wavelength scale to control, direct, and manipulate acoustic waves in uncommon ways [9, 10]. A low-cost 3D printer can therefore be used to

¹"Spatial Audio" exploits delays and intensity variations between speakers to create for the audience the experience of localised sources [1, 2].

²"Parametric speakers" use highly directional sources [3, 4], often used to deliver different sounds to parts of the audience [5, 6].

fabricate a "metasurface": a metamaterial designed to be thinner in the direction of propagation of the impinging sound which, once placed in front of a standard loudspeaker, can act as a lens, a diffraction grating, a holographic plate for sound [11–17]. Effects like anomalous refraction [18], self-bending [19] and super-lensing [20] have also been observed. Until recently, however, metamaterial solutions at audio frequencies were bulky or very limited in their frequency range.

Recently, Memoli et al. [21] have shown how to design metasurfaces of practical size for audio applications, with a bandwidth close to 1 octave: two crucial requirements for space-hungry applications in the audio range. These authors also demonstrated that simple design laws used in optics, like the thin lens equation, are also valid in acoustics when metamaterials are involved. Building on this finding, these authors managed to transform a commercial, low-cost speaker into a directional one [21] and to realise a low-cost personalised sound delivery system [22]. This has opened new opportunities, one of which is discussed here.

In this paper, we design an acoustic prism - i.e. a metasurface designed to emphasise or attenuate qualities of the sound in different places - and use it to deliver a soundscape composition into an indoor area. Through a user study (16 participants), we investigate whether a composer can give a spatial component to the perceived loudness, using just a single speaker and a metasurface in front of it. We find that the prism successfully allows the performer to transform the temporal dynamic of a composition into a spatial message, thus creating a unique audience experience.

2 STATE OF THE ART

Acoustic metasurfaces

Acoustic metamaterials are "common" materials - e.g. wood, metal or 3D-printer plastic - which, engineered at the sub-wavelength scale, have properties not otherwise available in nature [9, 10]. Of particular practical interest are acoustic metasurfaces [23] i.e. acoustic metamaterials whose thickness in the direction of propagation is smaller than one wavelength (i.e. less than 1 m for a 350 Hz tone in air).

Memoli et al. [17] showed how to give any desired diffraction limited shape to an acoustic field (including focusing sound or making it go round a corner) using an array of pre-configured, LEGO-like bricks, appropriately selected from a set of 16 designs. Each of these bricks has a labyrinthine meander [11], to delay the sound passing through. Used in transmission at a specific wavelength, each of the bricks encodes a corresponding phase shift on the passing sound, which depends on the wavelength. Bricks assembled into a structure, mounted in front of the acoustic source, allow tailored applications like the manipulation of directional audio [24] and human-computer interaction [19, 21].

For the audio-expert, the procedure to pass from a desired sound shape to an assembly of bricks is similar to WaveField Synthesis (WFS) [1]: each of the bricks approximates one of the secondary spherical sources in the Huygens-Fresnel principle and the metasurface is a hologram of the desired shape [15]. The main difference with WFS is that shaping sound through metamaterials is a passive and static process. The main advantage is that the sources can be as small as practically achievable: a single metasurface in front of a speaker may achieve what was previously possible only using multiple sources.

Spatial sound experiences

While designing a theatre or a cinema, architects strive to ensure everyone in the audience will get the same experience. While seats may have a different price according to the quality of the visual, in fact, this is unacceptable for sound: even in the case of 3D spatial audio, there is either the same sound for everyone or none.

Parallel to this binary approach to sound, the idea of using multiple sources to create spatially-dependent experiences has been practiced in music since the mid 16th [25], when choirs were positioned in different areas of churches and chapels to create a surround-sound-like experience. More recently, artists like La Monte Young (*Dream House* [26]), Bernhard Leitner (*Sound-Space* [27]) or Iannis Xenakis (*Philips Pavilion* [28]), have investigated the relationships between sound, space, and body, creating different acoustic experiences in a single space. Added to parametric speakers, these approaches lead to the theoretical concept of "sound zones" [29]: areas which are very close in the physical world (e.g. two adjacent seats in a theatre), but extremely far in terms of experience (e.g. two different sounds, without headphones).

These technologies, however, rely on multiple speakers: they easily increase in cost and energy consumption as the acoustic experience gets more complex or the area to cover gets larger. In this study, we propose a different approach: using one or more acoustic metamaterials to enrich a sound space. Metamaterial-based devices, like the prism used here, are in our vision a novel set of tools: used in parallel or as an alternative to multiple speakers, they enable to play with new compositional ideas, hitherto impossible.

3 EXPERIENCE DESIGN

In this work, we mimic the improvisation-based dialogue between a performer on stage and his/her audience. The presence of a meta-surface offers in fact an additional degree of freedom to the performer, who can play to different regions of the audience in a directional manner - splitting the harmonics of chords or projecting single tones. Here, we describe the two synergistic components underpinning

the final experience: the prism itself and the composition designed to exploit it.

Prism design

A prism in optics is a device that splits white light in its components, sending different colors in different directions, depending on their wavelength i.e. creating a rainbow. In this study, we use a metasurface to achieve a similar effect i.e. to redirect sound within a range of audible frequencies over a range of angles.

While most studies use numerical methods to design metasurfaces (see e.g. [15, 30, 31]), there are some cases where the desired shape of the sound can be connected to the phase map given by the bricks through analytical solutions [12]. A linear phase distribution across the metasurface, for instance, leads to "anomalous refraction" i.e. to a deflection of the impinging sound even at normal incidence. This effect is dictated by the generalized Snell's law [32]:

$$\sin \theta = \frac{c}{2\pi f} \frac{d\Phi}{dx} \quad (1)$$

where c is the speed of sound and θ is the desired angle at which we want to send that sound of frequency f . $\frac{d\phi}{dx}$ is the phase change profile of the device, where ϕ is the associated phase of the bricks along the x direction. According to equation (1), when the gradient is constant the angle of deviation only depends on the frequency: lower frequency notes would get a larger deviation than higher ones.

For this study, we used the designs reported in the supplementary information of [17], but scaled each brick to be 3 cm wide and 6 cm thick, thus expecting their output intensity to be maximised at ~ 5.6 kHz. As shown in Figure 1, this gives a total dimension of the device of $24 \times 24 \times 6$ cm. We exploit equation (1) and design our acoustic prism using a repeated pattern of 4 different bricks (with phase delays 23.3° , 115.6° , 226.2° and 335.3° at 5.6 kHz). The final device was fabricated using three-dimensional additive manufacturing, making it relatively inexpensive, compared to hardware based methods of redirecting sound. Furthermore, as metasurfaces are built separately from sound sources, our prism can be used with any standard audio speaker.

As shown in Figure 2, we used computer simulations (COMSOL Multiphysics) to predict the value of the gradient as a function of frequency of the impinging sound, assuming normal incidence. Preliminary results, obtained with 2D simulations and neglecting absorption effects in air, show that our arrangement of bricks gives a constant gradient $\frac{d\phi}{dx} = C(\lambda)$ in some regions of the audible spectrum, where C is a constant that depends on the wavelength. These regions are followed by others where the gradient varies significantly for a small variation of the frequency.

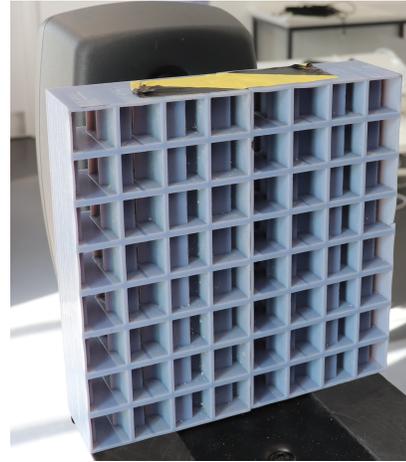


Figure 1: The 3D printed prism used in this study.

When used in front of a loudspeaker, our prism should therefore send the notes contained in the areas of small variation to very precise angles - e.g. the notes from 2,300 Hz (D_7) to 3,300 Hz (G_7) should go at a different angle from the ones between 4,300 Hz and 5,300 Hz (corresponding to the following octave, between D_8 and G_8). Within the regions of constant gradient, according to equation (1), the different notes should be sent at angles determined by their frequency.

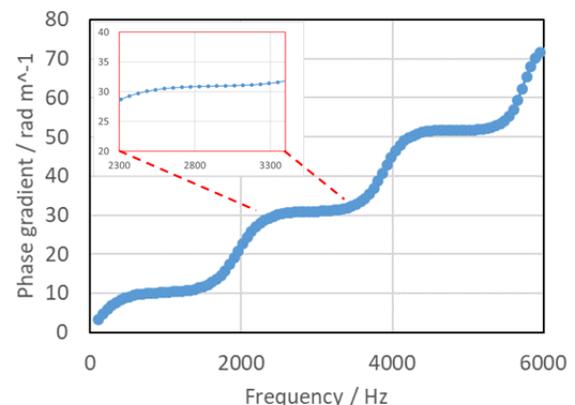


Figure 2: Simulated behaviour of the acoustic prism, as predicted by 2D COMSOL Multiphysics simulations. The plot shows that, as frequency changes, the value of the gradient $\frac{d\phi}{dx}$ (in rad m^{-1}) passes from areas of very small variation (e.g. between 2,300 Hz and 3,300 Hz in the inset) to regions of abrupt change.

Composition design

The music in this experimental setting was composed with the *Threnoscope* [33]: a musical interface designed for live performances, where real-time coding (live coding [34]) is projected on a display on stage and becomes a key part of the audience experience. The Threnoscope is built in SuperCollider [35] and its graphical interface (Figure 3) highlights the spatial and micro-tonal component of the composition. In the piece made for this study, the idea was to explore timbral "movement" in sound, for example through slight detuning of oscillators and resonant filtered white noise.

We distributed this effect over a number of "drones" (the shaded areas in Figure 3), each in charge of a different frequency range or aspect of the composition. The temporal evolution of the different drones is represented by changes in the corresponding colored region, as it rotates around the central axis in Figure 3 (see supplementary video). Normally, Threnoscope pieces work by sending drones to 8 different loudspeakers (represented by the 8 highlighted radii in Figure 3), relying on the distribution of the speakers in the room to create a spatial effect. In this experiment, however, we only use one of the 8 loudspeakers and rely on the prism to create a spatial effect.

The musical progression of the piece is slow and gives the listener the possibility of walking around the space in order to "tune into" and explore the spectral diffusion of the acoustic prism. In a sense, this piece transgresses the distinction between a composition and a sound installation in that, when run as software, it can evolve in a generative manner forever. A crude distinction between music and sound art would be that music is about time and sound art about space, and with this piece we are playing with both, thanks to the acoustic prism, which articulates and transforms the temporal features of the sound into a spatial, dynamical message.

What makes the use of the prism interesting in this compositional context is that through one speaker only, the spectrum of the sound is diffused across the space. This adds a novel experience for the listener, who can now navigate the space to experience nuanced qualities of the sound. Further work would be to add the prism in front of all the 8 speakers to create "zones of intensity".

4 USER TESTS

A user study was conducted using 16 participants (8 male and 8 female), all with normal hearing and with an age between 23 and 40. The test was run in an empty room, with a speaker and the prism on one side, together with a screen displaying the Threnoscope in action (see Figure 4). In order to minimise the effects of the room, the experiment was run in two different rooms, one smaller (reverberation time:

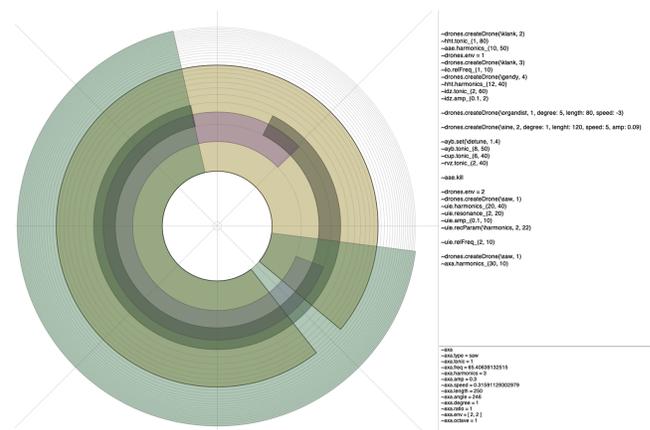


Figure 3: The Threnoscope in action, during the user experience. The visualisation highlights the different drones operating in the composition (colored regions on the left) and the code used to control them in real life (text on the right).

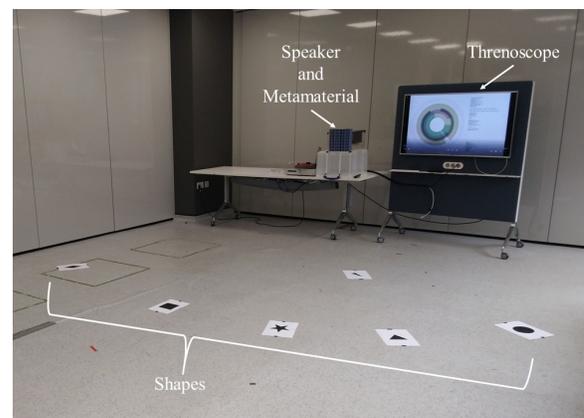


Figure 4: A wide shot of the area in front of the prism, highlighting the different shapes used during the user studies.

$T_{20} \sim 3s$ at 5 kHz) than the other ($T_{20} \sim 5s$) and with 8 participants in each. As shown in Figure 4, the floor of the room was marked with 8 different shapes, positioned at a range of angles between -40° ("Diamond") and $+40^\circ$ ("Circle")³ and at distances from the prism between 1.5 m and 6 m.

During the 10 minutes user experience, participants were asked to explore freely the space, but also to report the perceived loudness over the different shapes (using the chart in supplementary Figure 9a). Perceived loudness [36] was evaluated using a 5-point numerical Likert scale, as recommended for interview-based assessments [37]. After the "exploration" stage was over, users were then asked to fill a

³The emission of the speaker without the prism was perceived to be constant within this range of angles, changing by a maximum of 3 dB at 1.5 m.

questionnaire (see supplementary Figure 9b) with the purpose of assessing: the acoustic quality of their experience, whether they perceived a notable difference in intensity at different positions, their self-assessed sensitivity to noise [37]. Questions were left open-ended, as suggested by soundscape research [38], to capture the experience in the user's words. A list of key-words, previously used to assess user perception in auditoria [39], was also added at the end of the questionnaire.

5 RESULTS AND DISCUSSION

As mentioned earlier, in the first part of their experience, users were asked to explore the space and to report their perceived loudness in different locations, distributed on the floor like in Figure 5. This was done using a hand-held map of the space, where a scale of 1 (very quiet) to 5 (very loud) was reported near each of the marker (see supplementary Figure 9a). Figure 5 shows the results of this in-situ survey, plotted as the arithmetic mean (over the 16 participants) of the reported loudness at the different positions (error bars report the standard deviation). Some key results:

- The "Bolt" marker is a reference point and, being the closest, had the highest level of perceived loudness with a score of 3.75 ± 0.35 .
- The markers "Bolt" (1.5 m from the prism), "Star" (3 m) and "Cross" (6 m) are on the same line, at $+20^\circ$ from the axis in Figure 5. In absence of the prism, a reduction of 6 dB is expected with each doubling of the distance.
- The quietest perceived space in the room was at the "Diamond", which is 3 m and -40° from the prism, where the mean perceived loudness has a value of 2.88 ± 0.18 . This result confirms that most of the intensity goes towards one side of the prism.
- The first two markers on the $+20^\circ$ line have a very similar perceived loudness, significantly different from the other locations. This confirms that most of the intensity goes in one specific direction and that, along that direction, perceived loudness does not change much in the initial 3 m.
- Another interesting comparison is between the "Triangle" (at 3 m and $+40^\circ$), the "Star" (also at 3 m and $+20^\circ$) and the "Cross" (at 6 m and $+20^\circ$). While the "Star" has almost the same score as the "Bolt", the "Triangle" has almost the same perceived loudness as the "Cross" (where we would expect a reduced loudness, due to the distance). This suggests that, for the same loudness, a listener can therefore move at twice the distance or just step 20° to the side, while remaining at 3 m.
- A similar effect can be noticed between the "Circle" (3 m, $+60^\circ$) and the "Crescent" (6 m, 0°). Further studies will include microphone measurements.

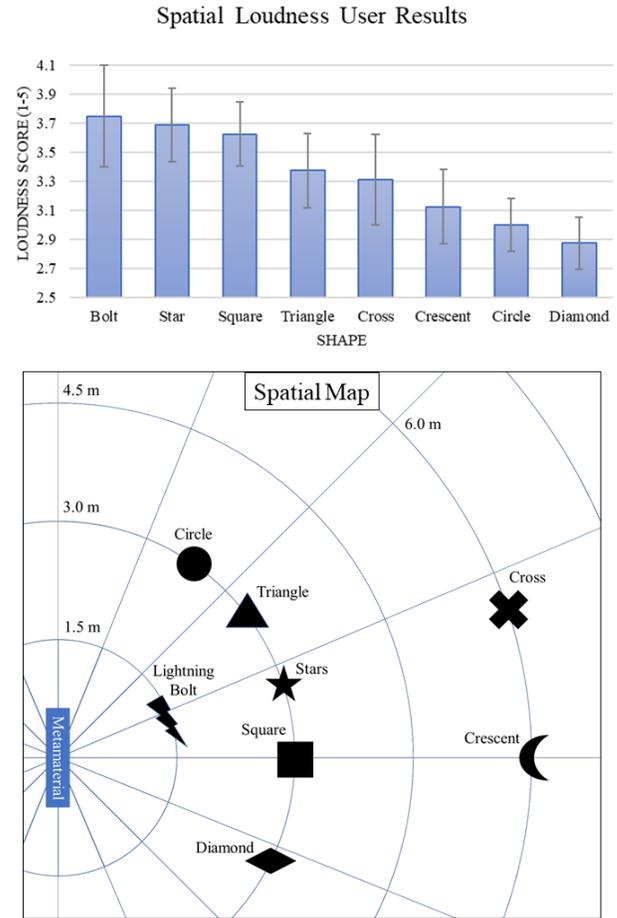


Figure 5: Top: a ranked bar chart of the mean perceived loudness at each marker, averaged over the results of 16 users sampled in two different rooms. The maximum perceived loudness was perceived at the "bolt" (1.5 m and 20° from the device) and the quietest perceived shape was the diamond (3 m and -40° from the device). Bottom: a to-scale plot of the spatial distribution of the shapes, relative to the metamaterial acoustic prism, positioned 102 cm above the floor.

An initial analysis of the responses to the question "Overall, how would you describe your experience?" (see supplementary Figure 9b) is visually summarised in Figure 6 through a word cloud, where the relative size of the words is proportional to their frequency of appearance in the feedback. The most frequent words show that the users remember the experience as "interesting" and "different". Some examples of users' feedback in this direction include "I felt the sound different at various locations in the room" and "There were different volumes at unexpected locations" or "It was interesting to hear the different variations of sound in the room". All the users noted the complexity of the soundscape, but in a non-uniform way (as shown by many different words of similar

6 CONCLUSIONS

In this work we have explored how an acoustic metamaterial prism may be used to redirect sound, and in particular a multi-frequency musical piece, to certain areas of a room.

We run a user study, where most of the participants perceived sound to be louder at some locations relative to the others. This was particularly true on one side and across a small range of angles. We also showed that, even if the transmission of our metasurface was optimised for a narrow band of frequency, the device could be successfully used to influence sound over a much larger range.

Most of our users described their experience as “different” and, when asked to highlight words from a pre-defined list, chose the words “reverberant” and “enveloping”, thus suggesting that the musical experience was changed (as well as redirected). Further studies are suggested to investigate the perceived aspects of the device, in particular using multiple speakers or repeated musical pieces.


This work has significant implications on the use of metasurfaces in musical performances or as a novel creative tool, giving composers an easy way to add a spatial dimension to their pieces. Applications are anticipated in cinemas, in concert venues or even in home theatres.

ACKNOWLEDGMENTS

The work was funded by the UK Engineering and Physical Sciences Research Council (EPSRC-UKRI) through grant EP/S001832/1. The authors would like to thank the reviewers for their useful suggestions.

REFERENCES

- [1] A. J. Berkhout, D. de Vries, and P. Vogel. Acoustic control by wave field synthesis. *Journ. of the Acoust. Soc. of Am.*, 93(5):2764–2778, 1993.
- [2] Francis Rumsey. *Spatial Audio (Music Technology) 3rd ed.* Focal Press, 2013.
- [3] Marinus M. Boone, Edwin N. G. Verheijen, and G. Jansen. Virtual reality by sound reproduction based on wave field synthesis. In *Audio Engineering Society Convention 100*, May 1996.
- [4] Jun Yang, Woon-Seng Gan, Khim-Sia Tan, and Meng-Hwa Er. Acoustic beamforming of a parametric speaker comprising ultrasonic transducers. *Sensors and Actuators A: Physical*, 125(1):91 – 99, 2005.
- [5] Yoichi Ochiai, Takayuki Hoshi, and Ipppei Suzuki. Holographic whisper: Rendering audible sound spots in three-dimensional space by focusing ultrasonic waves. In *Proceedings of the 2017 CHI Conference on Human Factors in Computing Systems*, CHI '17, pages 4314–4325, New York, NY, USA, 2017. ACM.
- [6] Anne-Claire Bourland, Peter Gorman, Jess McIntosh, and Asier Marzo. Project telepathy. *Interactions*, 25(5):16–17, August 2018.
- [7] W.-S. Gan, Y. Yang, and T. Kamakura. A review of parametric acoustic array in air. *Applied Acoustics*, 73(12):1211 – 1219, 2012.
- [8] F. Pokorny and F. Graf. Akustische vermessung parametrischer lautsprecherarrays im kontext der transauraltechnik (in german). In *Annual meeting of the German Acoustical Society (DAGA'14)*, 2014.
- [9] S. A. Cummer, J. Christensen, and A. Alú. Controlling sound with acoustic metamaterials. *Nature Reviews Materials*, 1:16001, 2016.
- [10] Guancong Ma and Ping Sheng. Acoustic metamaterials: From local resonances to broad horizons. *Science Advances*, 2(2), 2016.
- [11] Yong Li, Bin Liang, Zhong-ming Gu, Xin-ye Zou, and Jian-chun Cheng. Reflected wavefront manipulation based on ultrathin planar acoustic metasurfaces. *Scientific Reports*, 3, 2013.
- [12] Y. Li, X. Jiang, R. Li, B. Liang, X. Zou, L. Yin, and J. Cheng. Experimental realization of full control of reflected waves with subwavelength acoustic metasurfaces. *Phys. Rev. Applied*, 2:064002, Dec 2014.
- [13] Y. Xie, W. Wang, H. Chen, A. Konneker, B.-I. Popa, and S. A. Cummer. Wavefront modulation and subwavelength diffractive acoustics with an acoustic metasurface. *Nature Communications*, 5, 2014.
- [14] Xuefeng Zhu, Kun Li, Peng Zhang, Jie Zhu, Jintao Zhang, Chao Tian, and Shengchun Liu. Implementation of dispersion-free slow acoustic wave propagation and phase engineering with helical-structured metamaterials. *Nature Communications*, 7, 2016.
- [15] Kai Melde, Andrew G. Mark, Tian Qiu, and Peer Fischer. Holograms for acoustics. *Nature*, 537:518, 2016.
- [16] Johannes T.B. Overvelde, Twan A. de Jong, Yanina Shevchenko, Sergio A. Becerra, George M. Whitesides, James C. Weaver, Chuck Hoberman, and Katia Bertoldi. A three-dimensional actuated origami-inspired transformable metamaterial with multiple degrees of freedom. *Nature Communications*, 7, 2016.
- [17] Gianluca Memoli, Mihai Caleap, Michihiro Asakawa, Deepak R. Sahoo, Bruce W. Drinkwater, and Sriram Subramanian. Metamaterial bricks and quantization of meta-surfaces. *Nature Communications*, 8, 2017.
- [18] Kun Tang, Chunyin Qiu, Manzhu Ke, Jiuyang Lu, Yangtao Ye, and Zhengyou Liu. Anomalous refraction of airborne sound through ultrathin metasurfaces. *Scientific Reports*, 4, 2014.
- [19] M. A. Norasikin, D. Martinez Plasencia, S. Polychronopoulos, G. Memoli, Y. Tokuda, and S. Subramanian. Soundbender: Dynamic acoustic control behind obstacles. In *Proceedings of the 31st Annual ACM Symposium on User Interface Software and Technology*, UIST '18, pages 247–259, New York, NY, USA, 2018. ACM.
- [20] Meng Chen, Heng Jiang, Han Zhang, Dongsheng Li, and Yuren Wang. Design of an acoustic superlens using single-phase metamaterials with a star-shaped lattice structure. *Scientific Reports*, 8:1861, 2018.
- [21] G. Memoli, L. Chisari, J.P. Eccles, M. Caleap, B.W. Drinkwater, and S. Subramanian. Vari-sound: A varifocal lens for sound. In *Proceedings of CHI '19*, CHI '19, pages 483:1–483:14, New York, NY, USA, 2019.
- [22] Gianluca Memoli, Thomas J. Graham, Joshua T. Kybett, and Arash Pour Yazdan. From light to sound: Prisms and auto-zoom lenses. In *ACM SIGGRAPH 2019 Talks*, SIGGRAPH '19, pages 36:1–36:2, New York, NY, USA, 2019. ACM.
- [23] B. Assouar, B. Liang, Y. Wu, Y. Li, J.-C. Cheng, and Y. Jing. Acoustic metasurfaces. *Nature Reviews Materials*, 3:460–472, 2018.
- [24] Louis Jackowski-Ashley, Gianluca Memoli, Mihai Caleap, Nicolas Slack, Bruce W. Drinkwater, and Sriram Subramanian. Haptics and directional audio using acoustic metasurfaces. In *Proceedings of the 2017 ACM International Conference on Interactive Surfaces and Spaces*, ISS '17, pages 429–433, New York, NY, USA, 2017. ACM.
- [25] Deborah Howard, Laura Moretti, and Laura Moretti. *Sound and space in Renaissance Venice: architecture, music, acoustics*. Yale University Press New Haven/Londres, 2009.
- [26] William Duckworth and Richard Fleming, editors. *Sound and Light: La Monte Young and Marian Zazeela*. Associated University Presses, Cranbury, NJ, USA, 2009.
- [27] Bernhard Leitner. *Sound - space*. Hatje Cantz, Berlin, Germany, 1999.
- [28] Iannis Xenakis. *Formalized Music: Thought and Mathematics in Composition*. Pendragon Press, Hillsdale, NY, USA, 1992.
- [29] M. A. Poletti and F. M. Fazi. An approach to generating two zones of silence with application to personal sound systems. *The Journal of the Acoustical Society of America*, 137(2):598–605, 2015.

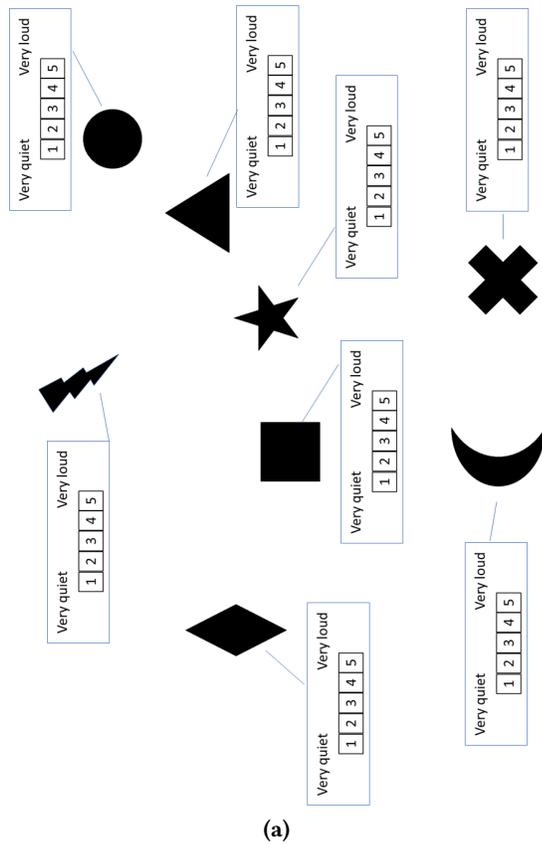

Questions to be answered after the musical experience is complete:

Overall, how would you describe your experience?

Did you find a difference between the sound at one marker and the sound at another? If you did, please describe the difference

Overall, how loud was the music?

1 - Very quiet	2 - Quiet	3 - Neither	4 - Loud	5 - Very loud

How sensitive are you to noise?

1 - Not at all	2	3	4	5 - Extremely

Do you have anything else that you want to say about the device?

Please indicate which words best describe the acoustics of the experience?

Dull	Clear	Mellow	Distant	Cold
Enveloping	Dry	Harsh	Warm	Focused
Bright	Muddy	Reverberant	Intimate	Lively

Figure 9: Running the user tests: (a) the perceived loudness map using during the "exploration" phase; (b) the questionnaire handed to the participants to the user study.

[30] M. D. Brown, B. T. Cox, and B. E. Treeby. Design of multi-frequency acoustic kinoforms. *Applied Physics Letters*, 111(24):244101, 2017.

[31] Yangbo Xie, Chen Shen, Wenqi Wang, Junfei Li, Dingjie Suo, Bogdan-Ioan Popa, Yun Jing, and Steven A. Cummer. Acoustic holographic rendering with two-dimensional metamaterial-based passive phased array. *Scientific Reports*, 6, 2016.

[32] Nanfang Yu, Patrice Genevet, Mikhail A. Kats, Francesco Aieta, Jean-Philippe Tetienne, Federico Capasso, and Zeno Gaburro. Light propagation with phase discontinuities: Generalized laws of reflection and refraction. *Science*, 334:333–337, 2011.

[33] Thor Magnusson. Improvising with the threnoscope: Integrating code, hardware, gui, network, and graphic scores. In *NIME*, 2014.

[34] Thor Magnusson. Herding cats: Observing live coding in the wild. *Computer Music Journal*, 38(1):8–16, 2014.

[35] James McCartney. Rethinking the computer music language: Supercollider. *Computer Music Journal*, 26(4):61–68, 2002.

[36] Eberhard Zwicker and Hugo Fastl. *Psychoacoustics. Facts and Models*. Springer-Verlag, 1999.

[37] J.M. Fields, R.G. De Jong, T. Gjestland, I.H. Flindell, R.F.S. Job, S. Kurra, P. Lercher, M. Vallet, T. Yano, R. Guski, U. Felscher-Suhr, and R. Schumer. Standardized general-purpose noise reaction questions for community noise surveys: research and a recommendation. *Journal of Sound and Vibration*, 242(4):641 – 679, 2001.

[38] Gaetano Licitra, Gianluca Memoli, Mauro Cerchiai, and Luca Nencini. Mapping soundscapes in urban quiet areas. *The Journal of the Acoustical Society of America*, 120(5):3278–3278, 2006.

[39] Trevor J. Cox and Bridget M. Shield. Audience questionnaire survey of the acoustics of the royal festival hall, london, england. *Acta Acustica united with Acustica*, 85(4):547–559, 1999.

[40] A. Case and A. Day. *Designing with Sound: Fundamentals for Products and Services*. O'Reilly Media, 2018.

A RESEARCH METHODS

Figure 9 reports the map used to assess loudness during the "exploration phase" and the questionnaire used for the final phase of the user study.

B ONLINE RESOURCES

Supplementary resources include a video with the music composed for this study. Only the last 10 minutes of this composition were used in the user tests.